


ALVAS WALL MOUNT ADJUSTABLE BALLET BARRE BRACKET SPECIFICATIONS

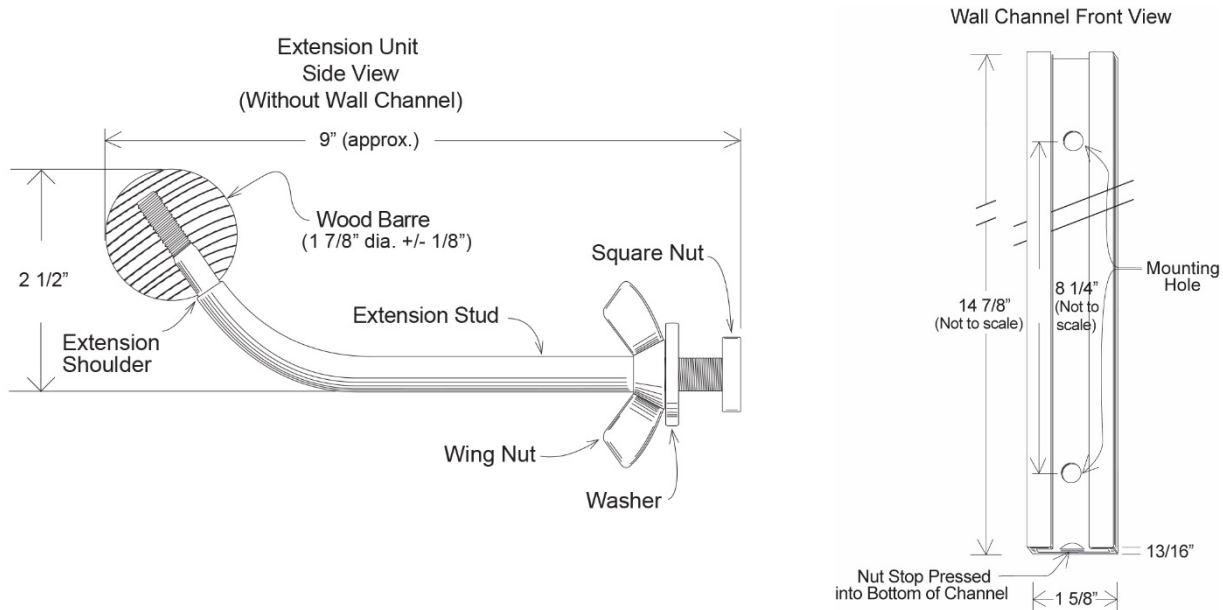

The wall Channel allows approximately 14" of adjustment.

Alvas Adjustable Brackets have a bright chrome finish, are made of steel and weigh approximately 2-1/2lbs each (Double Adjustable Brackets weigh approximately 3-1/2lbs). They include flat head screws, used for most drywall and wood stud applications.

SPACING FOR BRACKETS (CUSTOM BARRES)

Max Span: 80"
Max Overhang: 20"
Min Overhang: 2"


SPACING FOR BRACKETS (STANDARD BARRES)

The standard spacing for brackets are designed for Traditional Ballet use.

Barres used for ballet are generally used for balance only

4' Barre: 2 brackets spaced 32" apart (8" overhang)
6' Barre: 2 brackets spaced 48" apart (12" overhang)
7'10" Barre: 2 brackets spaced 64" apart (15" overhang)
10' Barre: 2 brackets spaced 80" apart (20" overhang)

14' Barre: 3 brackets spaced 64" apart (20" overhang)
16' Barre: 3 brackets spaced 80" apart (16" overhang)



The spacing accuracy for Alvas drilled wood barres are + or - 1/8".

If frequent height adjustment is required, no more than three adjustable brackets per barre length is recommended. It is harder to adjust barres that have more than three brackets.

SUGGESTED BARRE HEIGHTS FOR BRACKETS

Single Barre: 32" – 46" from floor (waist level)
Double Barre: 32" – 34" lower barre; 44" – 46" from the floor for upper barre
Distance from wall to barre: Inside = 7-1/4" (approx) Outside = 9" (approx)

SPECIFICATION DISCLAIMER

Alvas Barres Floors Mirrors (“Alvas”) encourages customers to have all Alvas products professionally installed and maintained by an experienced and licensed contractor. Alvas provides product specifications for clients’ information and convenience only. Alvas cannot and does not make any representations, warranties or guarantees with respect to the specifications of Alvas products or the accuracy thereof.

If you believe that a particular product does not meet the specifications provided or are unsure, please contact Alvas immediately. Failure to do so may adversely affect your rights under Alvas’ claims and return policies.

Improper installation, care or maintenance of any barre, floor, mirror, or other Alvas product may invalidate the product’s warranty or guarantee, if any. Alvas reserves the right to deny customer claims made pursuant to any such warranty or guarantee if Alvas determines the damage or defect to the product is the result of improper installation, care, maintenance or use of the product.